TRACKER
SAFE

Owner Use and Care Manual

<u>Model:</u>

FS121514-DLG

Tracker Safe LLC
6317 NE 63rd Street
Vancouver, WA 98661
(360) 213-0363
www.TrackerSafe.com

Document # Tracker Safe-Owner Use and Care Manual-FS-Rev1

Table of Contents

ATTENTION:

DO NOT STORE THIS MANUAL
IN YOUR SAFE

Serial Number:

____

Combination:

____

Original Receipt: *(Attach Here)*

Tracker Safe LLC
6317 NE 63rd Street
Vancouver, WA 98661
(360) 213-0363
www.TrackerSafe.com

Mechanical Dial Lock:


If the safe is in the unlocked position the door will open by turning the handle clockwise until it stops. Then pull door open.

If safe is in the locked position then please follow the directions below:

Operating your Mechanical Dial Lock:

Important Notes:

- *Turn the dial slowly and evenly.*
- *Do not over rotate past a number. If an error is made, start from the beginning.*
- *Always view the dial straight on, not at an angle.*

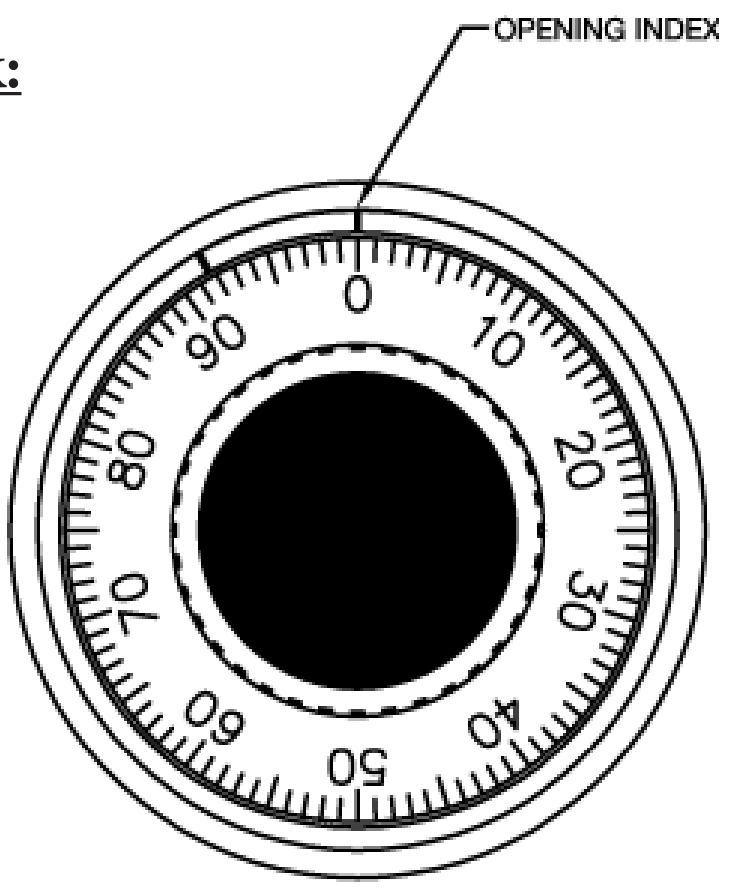

Use the Opening Index located at the twelve o'clock position.

1) Turn the dial **LEFT**(counterclockwise), passing the first number in your combination three times. Then stop exactly on the number the **FOURTH** time around.

2) Turn the dial **RIGHT**(clockwise), passing your second number in the combination two times. Then stop exactly on the number the **THIRD** time around.

3) Turn the dial **LEFT**(counterclockwise), passing the last number in the combination one time. Then stop exactly on the number the **SECOND** time around.

4) Turn the dial **RIGHT**(clockwise) until the dial stops completely. Then turn the safe handle clockwise to open the door.

To lock the safe: Close the door. Turn the handle counterclockwise until it stops. Spin the dial FOUR complete turns either direction. Turn the safe handle to be sure the safe is locked.

MANUAL DIAL LOCKS:
Once per year, have a certified lock technician service your lock.

INTERNAL LOCKING MECHANISM:
The internal locking mechanism does not require maintenance. However, if there is a sudden change in feel or operation of the safe or lock, please contact a certified lock or safe technician for immediate service.

HINGES:
Once per year, lubricate the ball bearing hinges with a silicone spray.

EXTERIOR CLEANING:
Use a soft cloth like a microfiber cloth with a mild cleaner (i.e., window cleaner) to clean the exterior of the safe. Make sure to wipe dry and never use harsh cleaners. Wipe around logos and graphics gently.

CHROME LOCKING BOLTS:
We recommend lubricating the chrome locking bolts once a year with a little Vaseline or other petroleum based lubricant.

MOISTURE / HUMIDITY:
We recommend that you use some form of a dehumidifier to control the level of moisture inside the safe.

Pre-Installation Notes:

The floor safe is not water tight or water proof. Caution should be taken when selecting a location.

If the safe is in a place where water might run into the safe, then raise the safe slightly above the floor and taper the concrete up to the dust cover.

Make sure you position the safe so that you may access the lock and that the door may be opened fully.

Installing the safe when pouring a new concrete slab:

Have the foundation contractor block out a hole with wooden forms as a place holder for where the safe will be located. Make sure the hole is three (3) to six (6) inches larger in both the width and depth dimensions of the safe.

After the foundation, wall framing, and roofing are complete, install the safe using the "Installing in an exisiting concrete slab" instuctions on page 7.

Installing in an existing concrete slab:

Step 1) Place the dust cover on top of the safe and duct tape it so that it is secure.

Step 2) Wrap the safe and the dust cover in a heavy duty plastic bag or sheet to make it water resistant. Set aside until Step 6.

Step 3) Select a location for the safe.

Step 4) Cut a hole in the concrete slab three (3) to six (6) inches larger then the safe's total width and total depth dimensions.

Step 5) Dig the dirt out of the hole three (3) to six (6) inches deeper then the safe's total height dimension with the dust cover installed.

Step 6) Mix concrete and fill the bottom of the hole with three (3) to five (5) inches of concrete.

Step 7) Place the plastic wrapped safe in the hole and push the safe down until the top is level with the finished floor or desired level.

Step 8) Finish pouring concrete to fill the hole. Be careful not to disturb the safe's position.

Step 9) Smooth the concrete even with the surrounding slab and the safe's dust cover.

Step 10) Allow the concrete to set and dry for at least 48 hours.

Step 11) Trim away the plastic, tape, and any excess concrete.

FS SERIES
LIMITED LIFETIME WARRANTY

Tracker Safe hereby warrants to the original purchaser that each new safe will be covered for damage caused by a fire, break-in, or an attempted break-in during the lifetime of the original purchaser if the homeowner's insurance policy will not cover the damage. Tracker Safe hereby warrants to the original purchaser that each new safe will be free from defects in materials and craftsmanship for one (1) year. This warranty applies only to safes located in the United States and that have been used for Residential use only.

<u>Lock:</u> The safe's lock is warranted to be free from defects in materials and craftsmanship for a period of one (1) year from the date of purchase by the lock manufacturer.

<u>Safe Contents:</u> This warranty only applies to the Tracker Safe itself; the warranty does not extend to the personal property stored in the safe.

Tracker Safe's obligation under this Limited Lifetime Warranty is contingent upon proper use, installation, and maintenance of the safe and does not apply to the safe or parts that have been misused, neglected, or exposed to unreasonable wear and tear, or exposed to unusual or extreme environments. Modifying or changing the safe in ways that alter or effect the safe's intended operation or use will void this warranty. Failure to bolt the safe to the floor using the factory pre-drilled holes voids this warranty. The decision to repair a safe in purchaser's home, at the factory, or to replace the safe, is solely that of Tracker Safe. If the safe is to be repaired at the factory or replaced, Tracker Safe will pay for the freight back to the factory. The purchaser is responsible for packaging and palletizing the safe for curbside freight pickup at their own expense. Tracker Safe does not cover any costs to package, remove or install the safe.

To receive support under Tracker Safe's Limited Lifetime Warranty the purchaser must provide the following:
1) Proof of Purchase
2) Warranty Registration Form
3) Written Testimonial
4) Pictures of the damaged safe
5) A police or fire department report
6) Insurance Documents

<u>Warranty Registration Form:</u> The warranty registration form is located in the Tracker Safe Owner Use and Care Manual that came with the safe. To validate this warranty, the original purchaser must fill out the warranty registration form and mail it to Tracker Safe within sixty (60) days of purchase.

The above warranty is given in place of all other warranties and assurances, whether expressed or implied, including warranties to fitness for purpose, quality, or merchantability. Tracker Safe accepts no liability, under any circumstances, for any incidental or consequential damage or loss suffered by anyone, or to any property, as a result of using or being unable to use the safe.

Any claims arising from this limited warranty shall be resolved in the State of Washington and Washington law will apply to any dispute.

Tracker Safe
Warranty Registraion form

Please provide us with a copy of your receipt along with this registration form within sixty (60) days from original purchase date.

Name: ______________________________________

Address:_____________________________________

City:_______________________________________

State:_____________Zip:_____________

Phone:______________________________

Email:_______________________________

Date of Purchase:__________________

Model Number:_______________________________

Safe Serial Number: :____________________________

Purchased From:_____________________________

Comments:

____

____

____

Mail to:
Tracker Safe LLC
6317 NE 63rd Street
Vancouver, WA 98661